


Kräftige Antriebe für grobe Einsätze

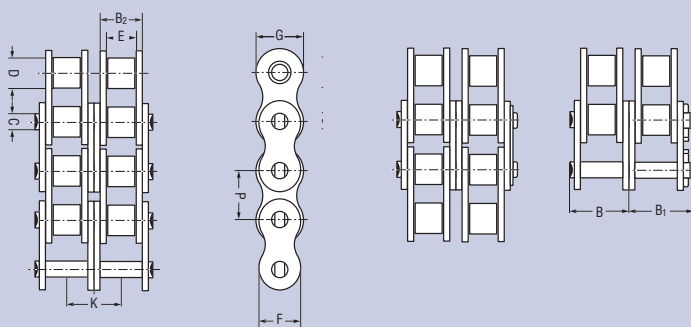

Zweifach-Rollenkette, Ansi H-Serie

Ketten Nr.	Teilung p		Abmessungen in mm									Mindest- Bruchkraft N	Gewicht q kg/m				
	Ansi	inch	mm	B	B ₁ max.	B ₂ max.	C max.	D max.	E min.	F	G			K	VF	VS	GG
60-2 H		0,750	19,050	27,55	29,75	19,43	5,96	11,91	12,70	15,64	18,09	26,11	110000	3,430	*	*	*
80-2 H		1,000	25,400	34,75	38,65	24,28	7,94	15,87	15,88	20,82	24,13	32,59	180000	5,910	*	*	*
100-2 H		1,250	31,750	41,54	44,73	29,10	9,54	19,05	19,05	26,03	30,16	39,09	280000	8,880	*	*	*
120-2 H		1,500	38,100	51,90	56,83	37,18	11,11	22,22	25,40	31,24	36,19	48,87	330000	12,500	*	*	*

* = Diese Verbindungsteile sind lieferbar